

# SRT Coil Flexible Rogowski Current Transformer

Made in the USA


- Input 10A to 100KA
- Output 333mV
- Accuracy Class 1.0
- Window Sizes 3.8" up to 25.1"



Measures AC currents in a broad range of frequencies and amperages, independent of coil size. Provides very little interference with the measured circuit. Immune to interference of DC current. Lightweight flexible design.

## Specifications:

- Single phase
- Rated input current (RMS): 10A to 100KA
- Output standard: 333mV, optional up to 5V
- Isolation Voltage: 3500V
- Accuracy:  $\pm 1\%$
- Frequency: 1Hz to 100KHz
- Operating Temperature  $-25^{\circ}\text{C}$  to  $700^{\circ}\text{C}$
- Lead wire: 42" shielded cable
- Power supply: 9V at 50mA (not included)
- UL certified tube material

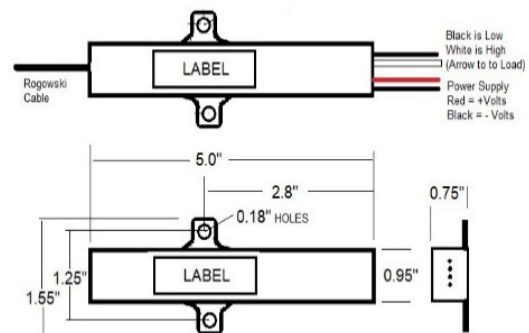

### SRT CURRENT TRANSFORMER COILS with Integrator

Part Numbers	Window inch	Length inch	Length mm	Output
SRT-4	3.8	11.8	300	333mV
SRT-7	7.5	23.6	600	333mV
SRT-10	10	31.5	800	333mV
SRT-15	12.5	39.4	1000	333mV
SRT-24	25.1	78.7	2000	333mV